

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
13 May 2004 (13.05.2004)

PCT

(10) International Publication Number
WO 2004/039611 A1

(51) International Patent Classification⁷: B60C 27/14, 27/02

(74) Agents: FAGGIONI, Carlo, Maria et al.; Fumero Studio Consulenza Brevetti, Via S. Agnese 12, I-20123 Milano (IT).

(21) International Application Number:

PCT/IB2003/002898

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 21 July 2003 (21.07.2003)

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: Italian

(26) Publication Language: English


(30) Priority Data:
1817/02 29 October 2002 (29.10.2002) CH

Declaration under Rule 4.17:

— as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY,

[Continued on next page]

(54) Title: QUICK-FIT ANTI-SKID SYSTEM FOR VEHICLE WHEELS AND ASSOCIATED DEVICE FOR FIXING TO THE WHEEL

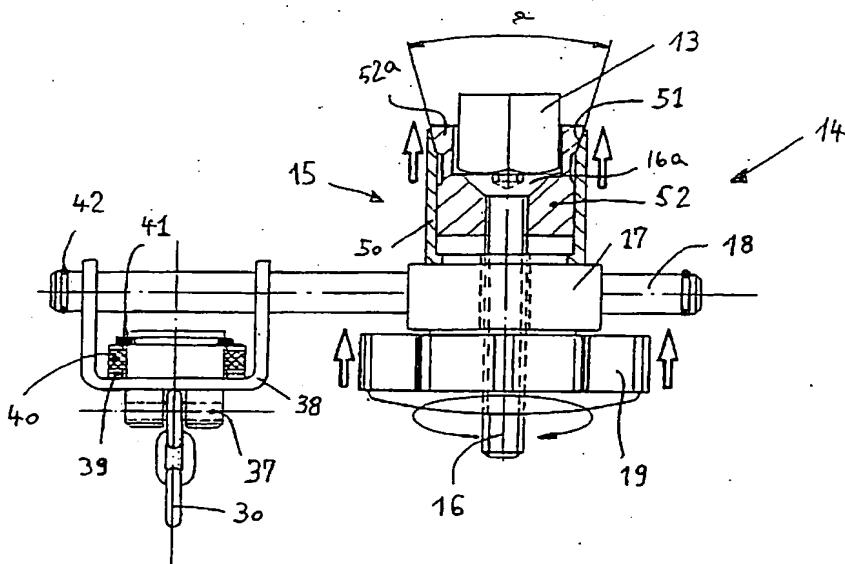

(57) Abstract: An anti-skid system for vehicle wheels is described, said system comprising gripping elements which are intended to make contact with the tread of the wheel and are arranged at the free ends of arms joined to a central connecting body, a clamping element (15) apt to be fastened to the rim of said wheel, and a constraining assembly able to establish a connection between said arms (21, 22) and said clamping element (15), the arms (21, 22) being in the form of flexible laminar strips and the constraining assembly comprising at least one linear traction member (30) which is non-extendable, but adjustable lengthwise; an advantageous clamping element (15) which makes the system more cost-effective and mounting thereof on the wheel more convenient is also described.

WO 2004/039611 A1